

Single Ended Beam Load Cell



FEATURES

- Capacities: 500 - 5000kg, 1K -10Klbs
- Low profile construction
- Certified to OIML R-60, 4000d and NTEP III, 5000 divisions
- Sealing: IP67 (DIN 40.050)
- Stainless steel construction
- Threaded load hole

OPTIONAL FEATURE

- FM certified for use in potentially explosive atmosphere



DESCRIPTION

The 9123 is a low profile single ended shear beam type load cell. The 9123 is stainless steel.

These products are suitable for small and medium platform scales, overhead track scales, hopper scales and process weighing applications.


Reliable sealing is ensured by the proprietary TRANSEAL potting compound and additional mechanical protection of the strain gage area.

Ease of installation is made possible through the use of a partially threaded hole to accept levelling feet, load buttons or loading cables.

APPLICATIONS

- Low profile platforms
- Pallet truck weighing
- Tank and silo weighing

OUTLINE DIMENSIONS in mm

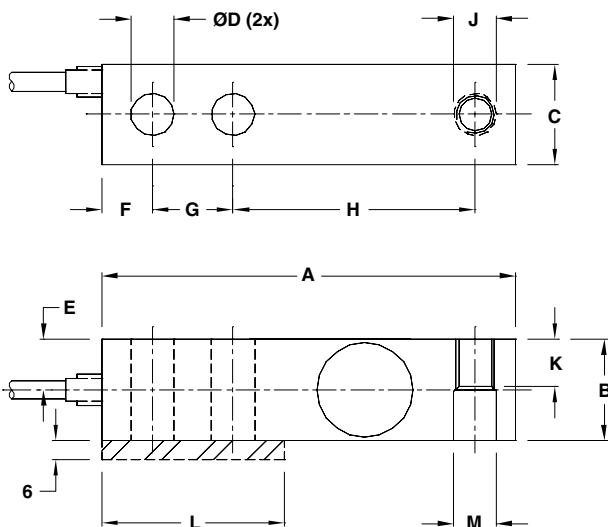

Cable specifications:

- Cable length: 6 m
- Excitation + Red
- Excitation - Black
- Output + Green
- Output - White
- Shield Transparent

Cable screen is not connected to load cell body. Performance may be affected if load cell cables are shortened.

Capacity	Dimensions in mm		Dimensions in inches	
	0.5t - 2t	5t	1K - 4K	5K - 10K
A	130.0	171.5	5.12	6.75
B	31.5	37.8	1.23	1.45
C	31.8	38.1	1.23	1.45
ØD	13.5	20.7	0.53	0.78
E	15.7	19.1	0.62	0.72
F	15.7	19.1	0.62	0.75
G	25.4	38.1	1.00	1.50
H	76.2	95.3	3.00	3.75
J	M12x1.75-6H	M20x2.5-6H	□-20UNF-2B	□-16UNF-2B
K	15.7	19.1	0.62	0.75
L	57.2	76.2	2.25	3.00
ØM	13.5	20.7	0.53	0.78

**SPECIFICATIONS**

PARAMETER	VALUE				UNIT
Standard capacities (E_{max})	500, 1000, 2000, 5000*				kg
Standard capacities (E_{max})	1K, 2.5K, 4K, 5K, 10K*				lbs
Accuracy class according to OIML R-60 /NTEP	NTEP III	Non-Approved	C3	C4	
Max. no. of verification intervals	5000		3000	4000	
Min. verification interval ($V_{min}=E_{max}/Y$)			$E_{max}/6000$	$E_{max}/8000$	
Min. verification interval, type MR			$E_{max}/10000$	$E_{max}/18000$	
Rated output (=S)	3				mV/V
Rated output tolerance	0.003				\pm mV/V
Zero balance	1.0				\pm % FSO
Combined error	0.0200	0.050	0.023	0.018	\pm % FSO
Minimum dead load output return	0.0250	0.050	0.017	0.013	\pm % applied load
Non-repeatability	0.0100	0.070	0.035	0.026	\pm % FSO
Creep error (30 minutes)		0.060	0.025	0.018	\pm % applied load
Temp. effect on min. dead load output	(0.0008)	0.0250	0.0120	0.0088	\pm % FSO/5°C (°F)
Temp. effect on min. dead load output, type MR			0.0070	0.0039	\pm % FSO/5°C
Temperature effect on sensitivity	(0.0010)	0.0250	0.0088	0.0065	% applied load/5°C (°F)
Minimum dead load	0				% E_{max}
Maximum safe over load	150				% E_{max}
Ultimate over load	300				% E_{max}
Maximum safe side load	100				% E_{max}
Deflection at E_{max}	0.4/ 0.8/ 1.0/ 1.1 - kg		0.4/ 0.8/ 1.0/ 0.9/ 1.1 - lbs		mm
Excitation voltage	5 to 12				V
Maximum excitation voltage	15				V
Input resistance	350 \pm 3.5				Ω
Output resistance	350 \pm 3.5				Ω
Insulation resistance	\geq 5000				M Ω
Compensated temperature range	-10 to +40				°C
Operating temperature range	-40 to +80				°C
Storage temperature range	-50 to +90				°C
Element material	Stainless steel				
Sealing (DIN 40.050 / EN60.529)	IP67				
Recommended torque on fixation bolts	0.5 - 2t & 1K - 4K: 149		5K & 5t and over: 271		N*m

* 5t and 10K are not approved by OIML

FSO-Full Scale Output

Correct mounting of the load cell is essential to ensure optimum performance. Further information is available on request.

VISHAY TRANSDUCERS (VT) SALES OFFICES

VT Americas
City of Industry, CA
PH: +1-626-858-8899
FAX: +1-626-332-3418
vt.us@vishaymg.com

VT Netherlands
Breda
PH: +31-76-548-0700
FAX: +31-76-541-2854
vt.nl@vishaymg.com

VMG UK
Basingstoke
PH: +44-125-646-2131
FAX: +44-125-647-1441
vt.uk@vishaymg.com

VMG Israel
Netanya
PH: +972-9-863-8888
FAX: +972-9-863-8800
vt.il@vishaymg.com

VMG Germany
Heilbronn
PH: +49-7131-3901-260
FAX: +49-7131-3901-2666
vt.de@vishaymg.com

VT China
Tianjin
PH: +86-22-2835-3503
FAX: +86-22-2835-7261
vt.prc@vishaymg.com

VMG France
Chartres
PH: +33-2-37-33-31-20
FAX: +33-2-37-33-31-29
vt.fr@vishaymg.com

VT Taiwan*
Taipei
PH: +886-2-2696-0168
FAX: +886-2-2696-4965
vt.roc@vishaymg.com
*Asia except China



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.